

# SAW Filter $\Phi\Pi3\Pi7-509-108$

## Application:

Input circuits of transmitting and receiving equipments of common applications

## Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

**Metal package:** DLCC 14.10-1


## Pin configuration:

- 2 – input;
- 13 – output;
- other – ground

## Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	154
Insertion loss	dB	3,0
3 dB bandwidth	MHz	3,5
Relative attenuation	dB	40
Temperature coefficient of frequency	ppm	-70

## Frequency Response

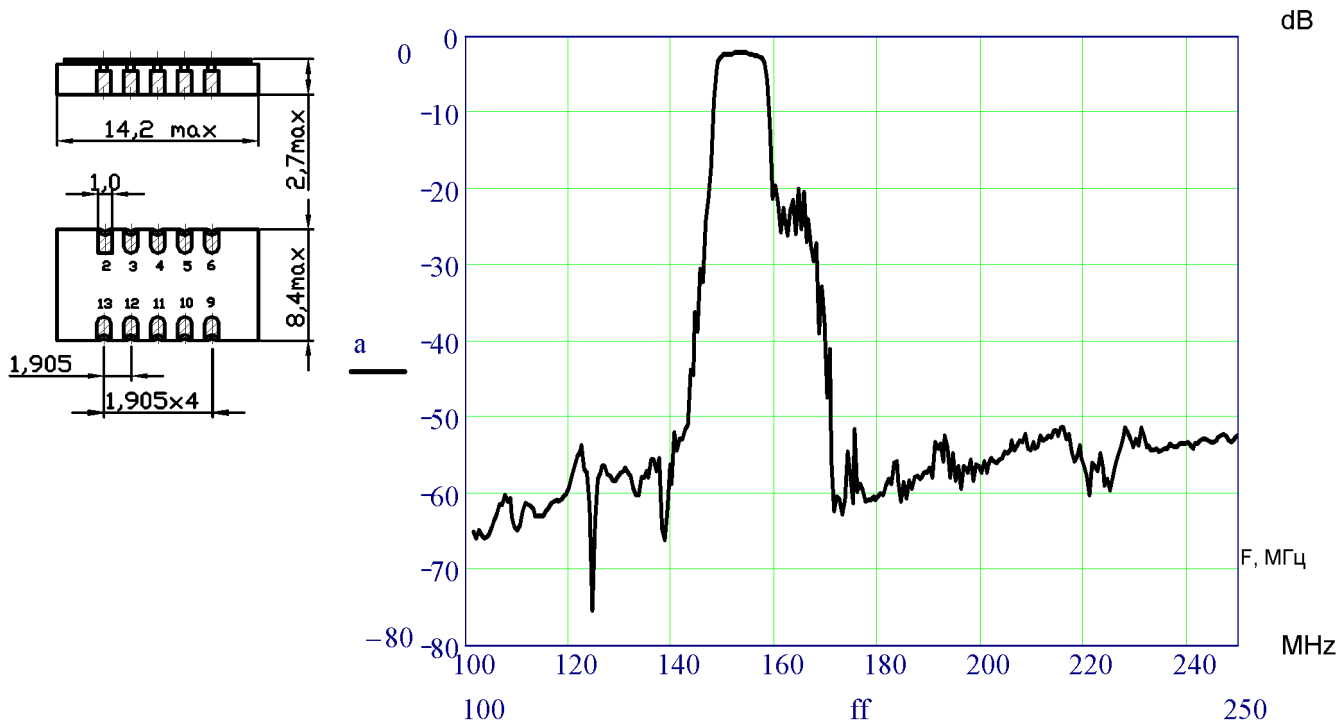

## Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya, 29

Tel/fax (495) 411-96-08; 411-96-09

E-Mail: Butis.M@ru.net

<http://www.butis-m.ru>