

SAW Filter $\Phi\Pi3\Pi7-509-302$

Application:

Input circuits of transmitting and receiving equipments of common applications

Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

Metal package: DIP 4K



Pin configuration:

- 1 – input;
- 3 – output;
- 2,4 – ground

Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	320
Insertion loss	dB	5,0
3 dB bandwidth	MHz	5,8
Relative attenuation Fcen – 8 MHz Fcen + 8 MHz	dB	40
Relative attenuation Fcen – 12 MHz fcen + 12 MHz	dB	60
Temperature coefficient of frequency	ppm	-72

Frequency Response

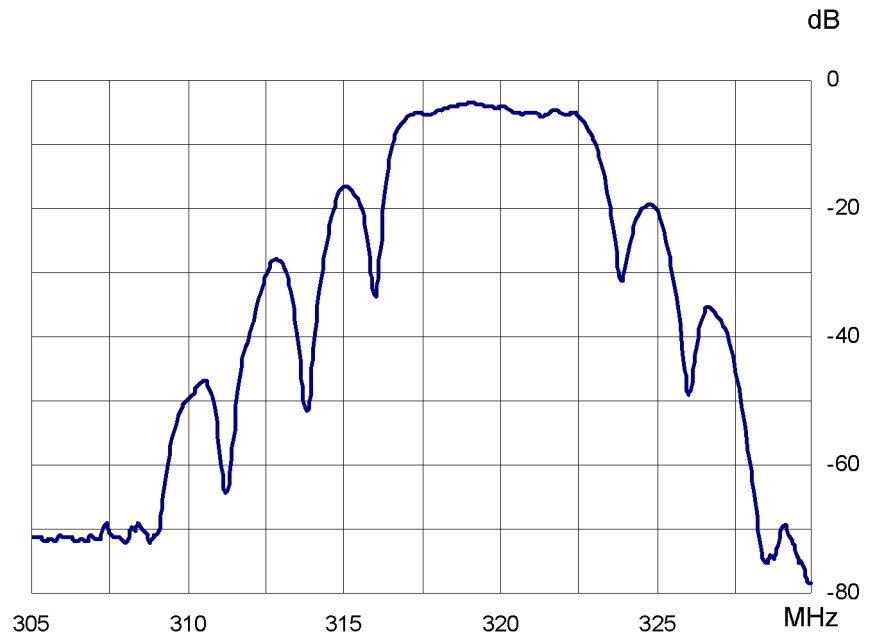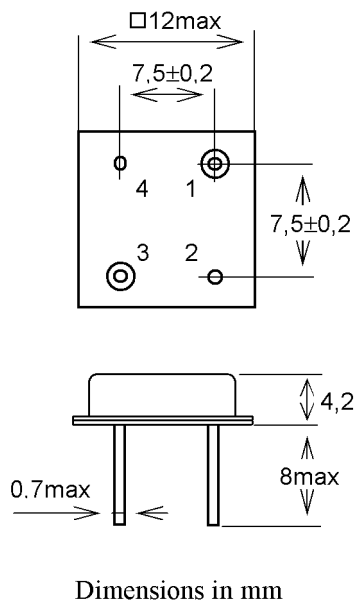

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya , 29

Tel/fax (495) 411-96-08; 411-96-09