

SAW Filter ФП3П7-509-103

Application:

Input circuits of transmitting and receiving equipments of common applications

Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

Metal package: DIP 4K


Pin configuration:

- 1 – input;
- 3 – output;
- 2,4 – ground

Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	162
Insertion loss	dB	4,5
3 dB bandwidth	MHz	3,1
Relative attenuation fcen – 5 MHz fcen + 5 MHz	dB	40
Relative attenuation fcen – 10 MHz fcen + 10 MHz	dB	60
Temperature coefficient of frequency	ppm	-72

Frequency Response

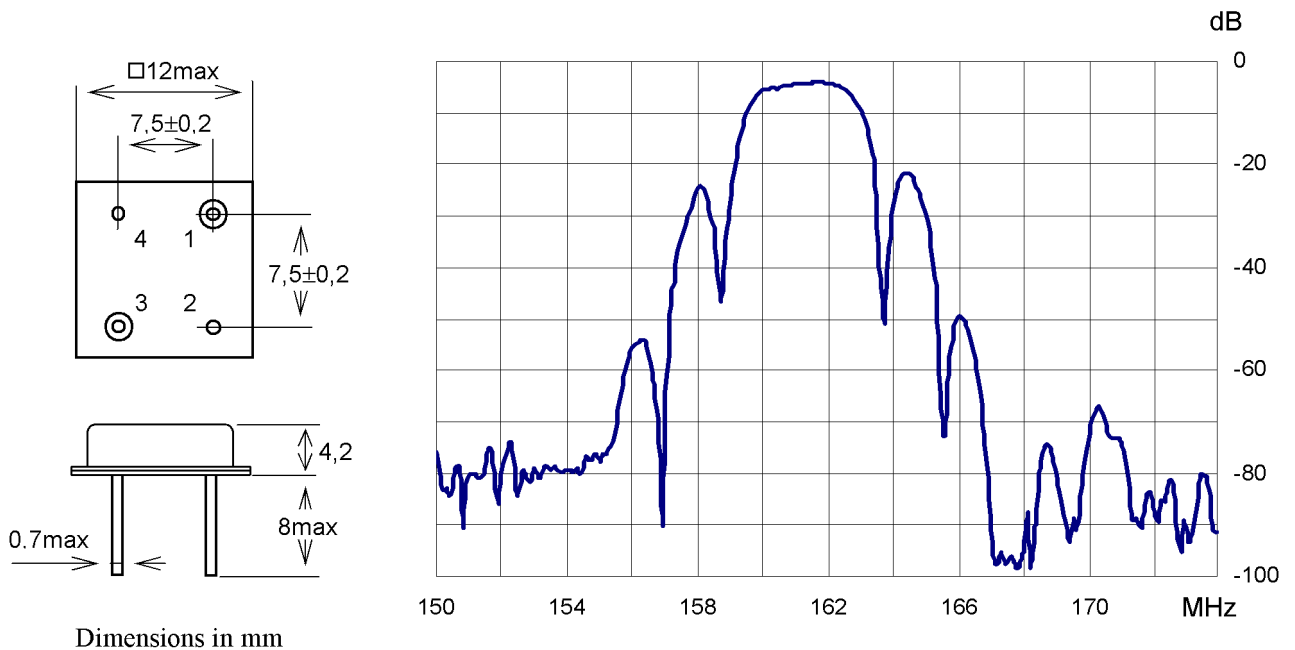

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya , 29

Tel/fax (495) 411-96-08; 411-96-09