

SAW Filter ФП3П7-509-107

Application:

Input circuits of transmitting and receiving equipments of common applications

Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

Metal package: DLCC 14.10-1

Pin configuration:



- 4 – input;
- 11 – output;
- other – ground

Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	169,0
Insertion loss	dB	6,0
3 dB bandwidth	MHz	2,5
40 dB bandwidth	MHz	8,6
Relative attenuation	dB	40
Temperature coefficient of frequency	ppm	-72

dB

Frequency Response

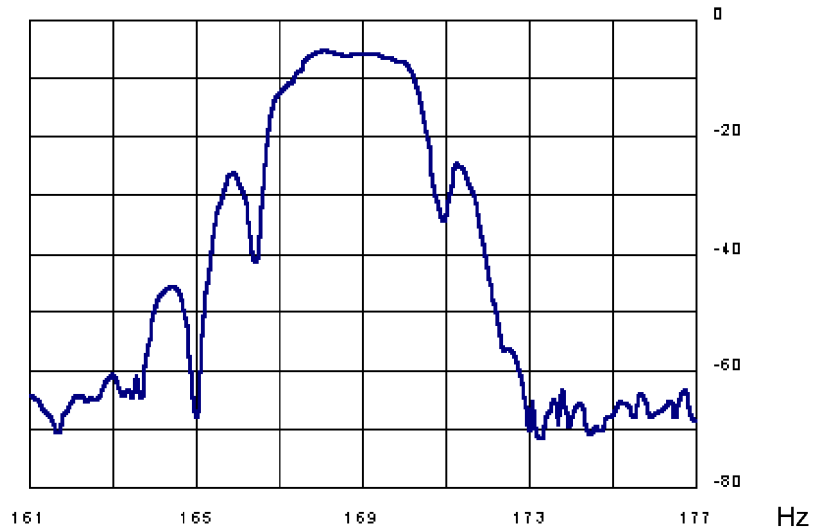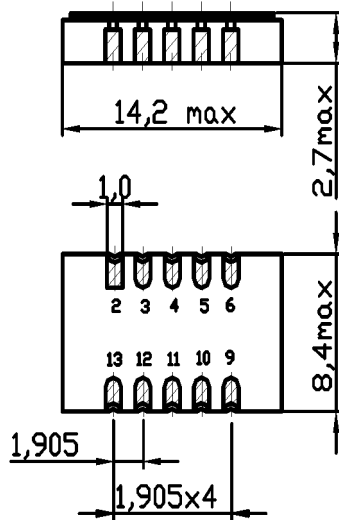

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya, 29

Tel/fax (495) 411-96-08; 411-96-09