

SAW Filter ФП3П7-509-110

Application:

Input circuits of transmitting and receiving equipments of common applications

Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

Metal package: DIP 4K



Pin configuration:

- 1 – input;
- 3 – output;
- 2,4 – ground

Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	132
Insertion loss	dB	2,7
3 dB bandwidth	MHz	4,1
40 dB bandwidth	MHz	-3,6/+7,8
Relative attenuation	dB	55
Temperature coefficient of frequency	ppm	-70

Frequency Response

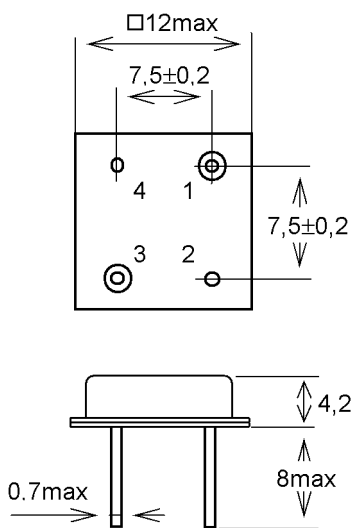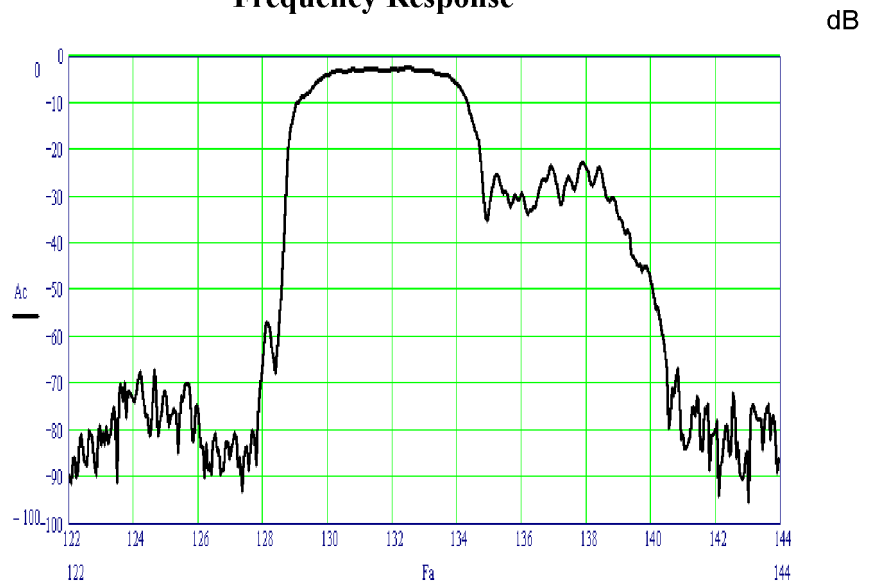

Dimensions in mm

MHz

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya, 29
Tel/fax (495) 411-96-08, 411-96-09