

SAW Filter $\Phi\Pi3\Pi7-509-209$

Application:

Input circuits of transmitting and receiving equipments of common applications

Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

Metal package: DIP 4K



Pin configuration:

- 1 – input;
- 3 – output;
- 2,4 – ground

Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	295,0
Insertion loss	dB	5,5
3 dB bandwidth	MHz	5,0
Relative attenuation	dB	50
Temperature coefficient of frequency	ppm	-70

Frequency Response

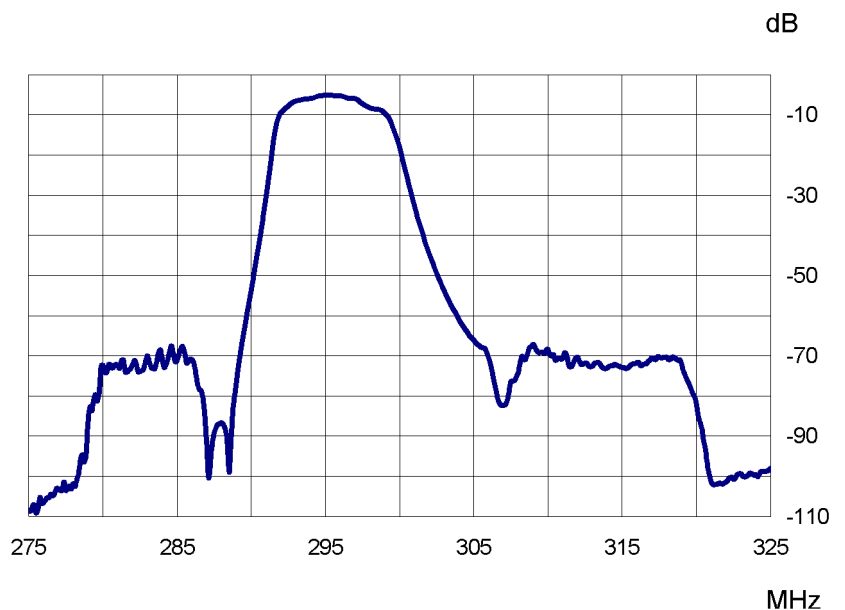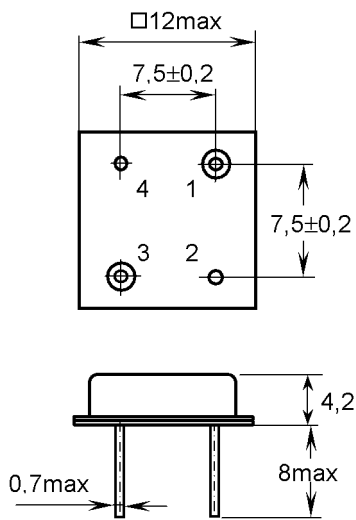

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya, 29

Tel/fax (495) 411-96-08; 411-96-09

E-mail: Butis.M@ru.net <http://www.butis-m.ru>