

SAW Filter ФП3П7-509-210

Application:

Input circuits of transmitting and receiving equipments of common applications

Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$


Metal package: DIP 4K

Pin configuration:


- 1 – input;
- 3 – output;
- 2,4 – ground

Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	215
Insertion loss	dB	4,7
3 dB bandwidth	MHz	10,6
40 dB bandwidth	MHz	-8,1/+9,7
Relative attenuation	dB	60
Temperature coefficient of frequency	ppm	-70

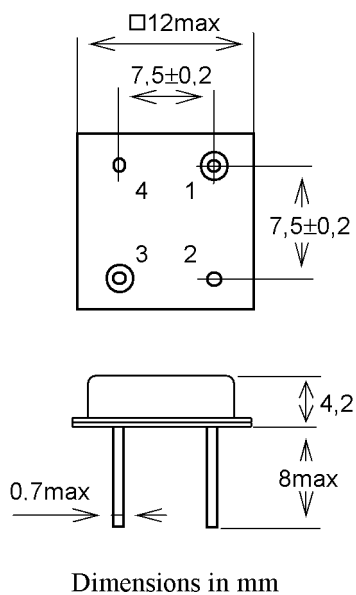

Frequency Response

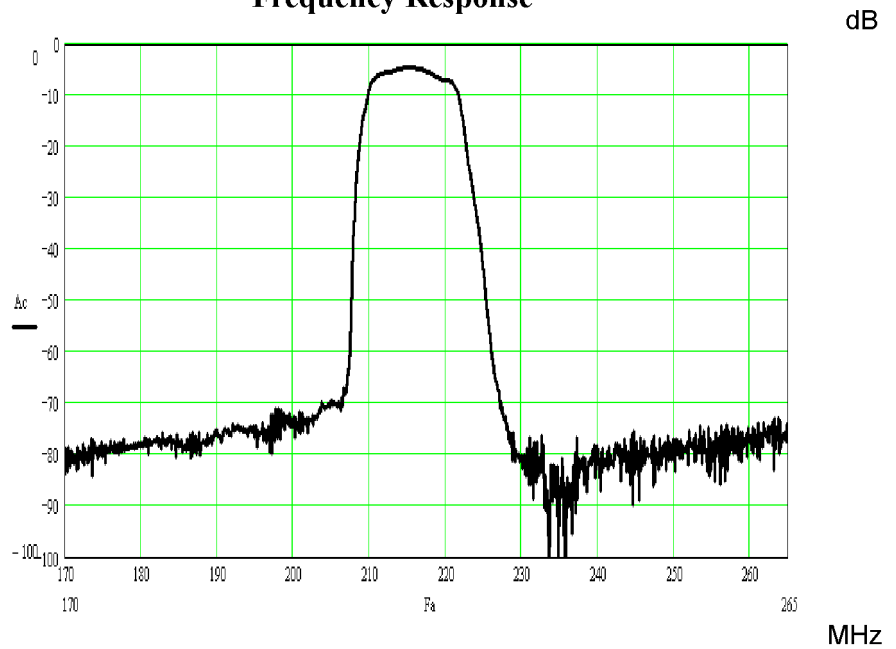

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya, 29

Tel/fax (495) 411-96-08, 411-96-09