

# SAW Filter ФП3П7-509-303

## Application:

Input circuits of transmitting and receiving equipments of common applications

## Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

## Metal package: DIP 4K


## Pin configuration:

- 1 – input;
- 3 – output;
- 2,4 – ground


## Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	350
Insertion loss	dB	5,0
3 dB bandwidth	MHz	6,1
Relative attenuation Fcen – 10 MHz Fcen + 10 MHz	dB	40
Relative attenuation Fcen – 12 MHz fcen + 12 MHz	dB	50
Temperature coefficient of frequency	ppm	-72

## Frequency Response

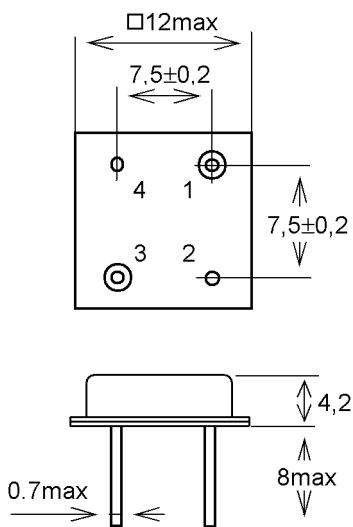

Dimensions in mm

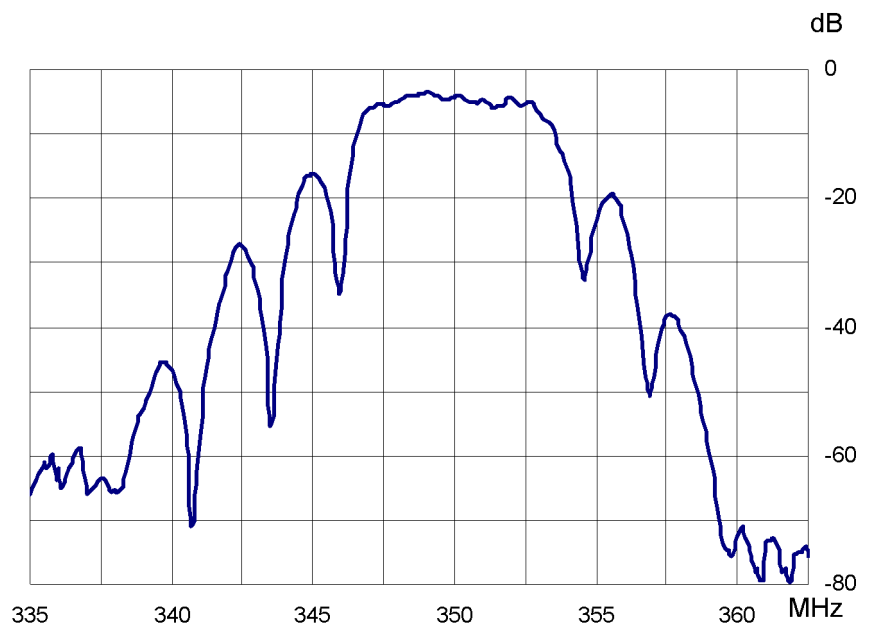

## Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya, 29

Tel/fax (495) 411-96-08; 411-96-09