

# SAW Filter $\Phi\Pi3\Pi7-509-304$

## Main Electrical Parameters

### Application:

Input circuits of transmitting and receiving equipments of common applications

### Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$



### Metal package: DIP 4K

### Pin configuration:

- 1 – input;
- 3 – output;
- 2,4 – ground

Parameter	Unit	Typ. value
Center frequency	MHz	380
Insertion loss	dB	5,5
3 dB bandwidth	MHz	7,0
40 dB bandwidth	MHz	14,0
Relative attenuation	dB	65
Temperature coefficient of frequency	ppm	-70

## Frequency Response

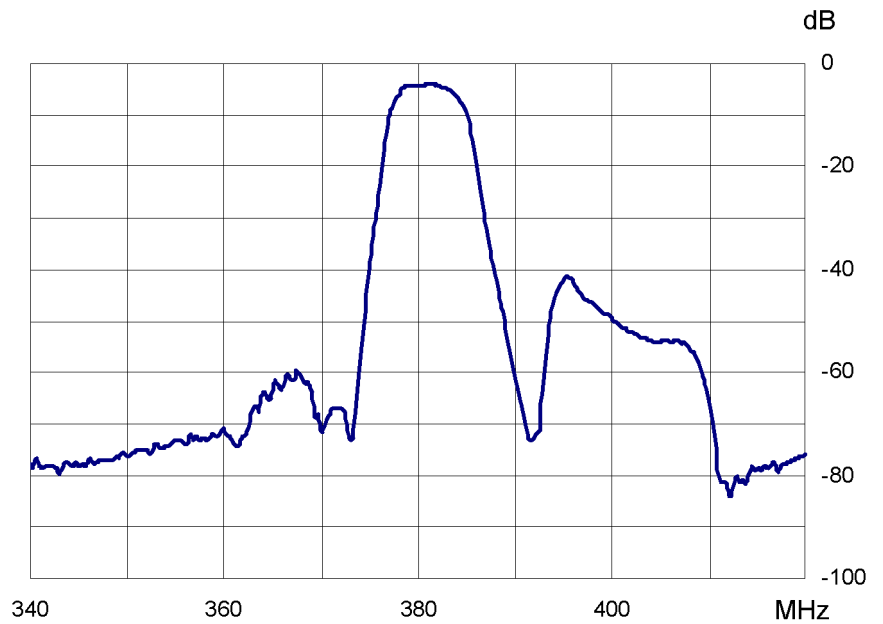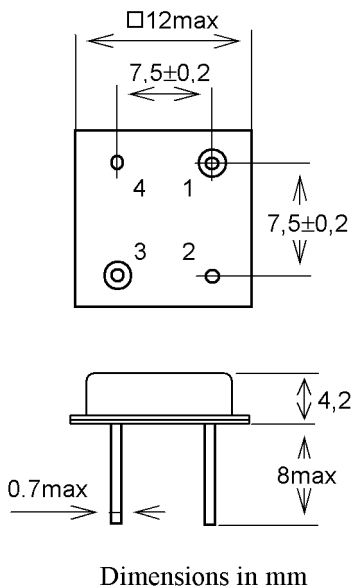

### Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya , 29  
Tel/fax (495) 411-96-08; 411-96-09