

SAW Filter $\Phi\Pi3\Pi7-509-305$

Application:

Input circuits of transmitting and receiving equipments of common applications


Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

Metal package: DIP 4K

Pin configuration:

- 1 – input;
- 3 – output;
- 2,4 – ground

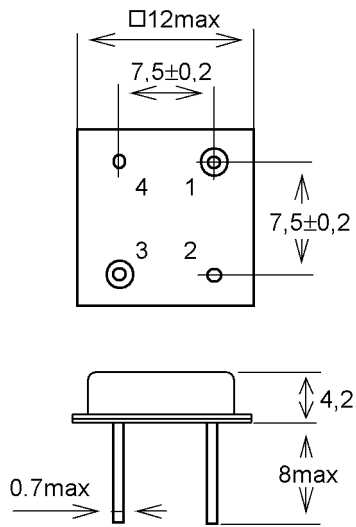


Dimensions in mm

Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	334
Insertion loss	dB	8,0
3 dB bandwidth	MHz	5,0
50 dB bandwidth	MHz	15,0
Relative attenuation	dB	70
Temperature coefficient of frequency	ppm	-70

Frequency Response

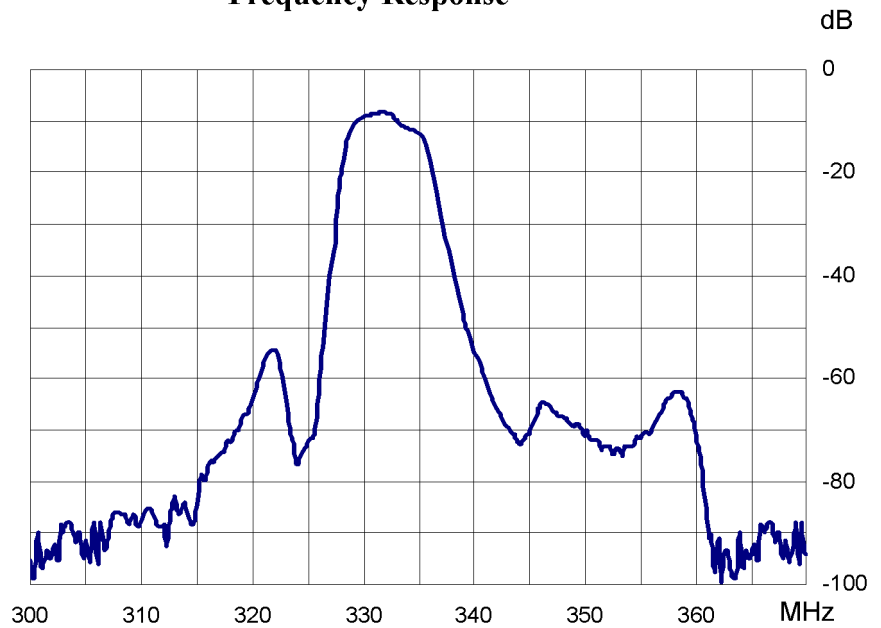

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya , 29

Tel/fax (495) 411-96-08; 411-96-09